

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning:

This unit is Safety Extra Low Voltage and must not be earthed.



Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

This system operates at Safety Extra Low Voltage (12V), via a transformer. Never connect the light fittings directly to the mains without using a transformer.

Always unplug the transformer from the mains when installing or maintaining this system.

Only use the correct type and wattage bulb.

When changing a bulb, always switch off at the mains and allow the old bulb to cool down before handling.

Dispose of used bulbs carefully and responsibly.

This product can be dimmed using a compatible dimmer and transformer.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist.


Check with your local authority or retailer for recycling advice.

Layout:

- Plan the desired layout of these fittings carefully, ensuring the cables will reach the distances between the transformer, connector block (if used) and each light fitting.
- Ensure that there is adequate ventilation for the transformer.
- Avoid locating any cables in positions that would cause a hazard. Position cables and connector block away from areas where they may be at risk from being cut, trapped or damaged.
- Cables that are to be in walls must be protected using suitable conduit or plastic trunking.


Installation:

1. Position the transformer next to the mains source that the system will connect to. Do not connect at this stage.
2. After deciding the position of the light fitting, ensure that long enough cables are fitted to connect in the desired position.
3. Cut the mounting hole for the light unit taking care not to damage any pipes or mains cables beneath the mounting surface. The hole size needs to be 68 x 68mm and a minimum of 45mm deep.

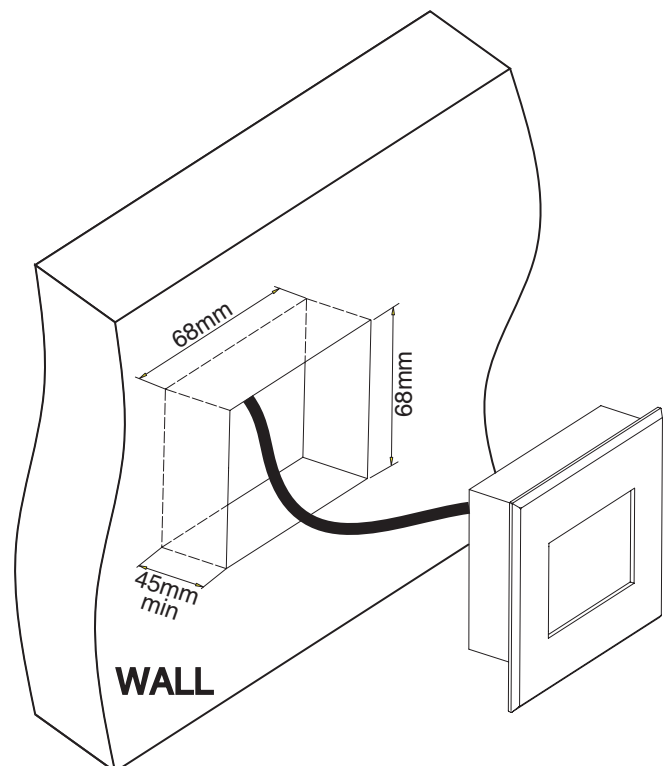

Wiring:

4. Connect the output cable from the transformer to the terminals as indicated below.

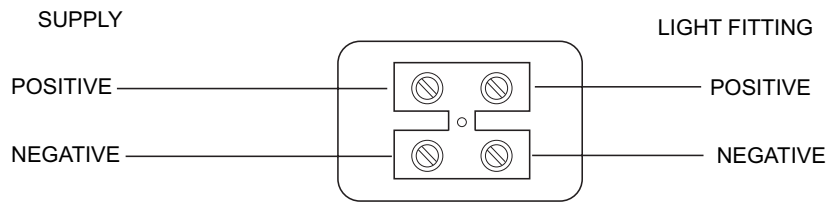


5. Push the unit into the hole to secure.
6. Connect the transformer into the mains supply. Refer to the transformer instructions.
7. Replace fuse or circuit breaker and switch on. Your light is now ready for use.

Fitting / Replacing Bulbs:

For the Design IA and Design IB models, gently pull the front fascia away from the unit. For the Design IC and Design ID models, gently pull the internal cover away. When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully. Do not exceed the wattage stated or use a different shape bulb from that indicated on the fitting.

Use a soft cloth to handle bulbs, avoid directly touching the bulbs as this will shorten their life.

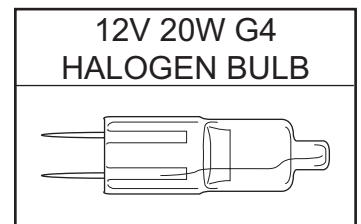

Care and Cleaning:

Do not use abrasive materials and cleaners on these products as this may damage the finish.

Glass parts - Wipe carefully using a damp cloth. Do not use abrasive materials as these will damage the finish.

Safety Information:

For your safety, always switch off the supply before changing lightbulbs, cleaning or removing shades.



Saxby Lighting Ltd. BH23 3PE