

Commisioning


9. Position the light so it illuminates the desired feature.
10. Replace fuse or circuit breaker and switch on. Your light is now ready for use.

Fitting / Replacing Bulbs

When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully. Use a soft cloth to handle bulbs, avoid directly touching the bulbs as this will shorten their life. Do not exceed the wattage stated or use a different shape bulb from that indicated on the fitting.

9. Undo the four screws holding the cover and glass shade in place.
10. Remove the bulb.
11. Locate the pins into the lampholder and push fully home.
12. Replace the glass and cover, ensuring that the seal is correctly located. Refit the screws ensuring that it is tightened firmly and evenly.

12V 50W MAX MR16
HALOGEN BULB



Care and Cleaning

Do not use solvents or abrasive cleaners as these could damage the finish.
Glass parts - Remove and wash in warm water or just use a damp cloth. Do not use abrasive materials as these will damage the finish.

Do not clean the units with a pressure washer.

Recycling Advice



Waste electrical products should not be disposed of with household waste.
Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

Safety Information

For your safety, always switch off the supply before changing lightbulbs, or cleaning.
This system contains non-replaceable parts and cannot be serviced. If damage occurs the part should be scrapped.



Saxby Lighting Ltd. BH23 3PE

saxby
lighting



Opaz

OL3B

Thank you for purchasing this light fitting.

Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

III This is a Class 3 product and must be not be earthed.

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a fused circuit.

If replacing an existing fitting, make a careful note of the connections.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

This product can be dimmed using a compatible dimmer and transformer.

This product is rated at IP68.


This product is not suitable for location in or near a marine environment.

This product is not suitable for location in swimming pools or spas.

Specification

Voltage:	12V SELV
Lamp:	50W MR16 GU5.3
IP rating:	68

Layout



Spotlights give a concentrated beam of light and must not be positioned any closer than 0.5m (50cm) to the illuminated surface.


- Decide on the position of the luminaire.
- This product requires a separate transformer (not supplied). Refer to the transformer instructions for details on connection, positioning and safety information.
- Avoid locating any cables in positions that would cause a hazard. Position cables and connector block away from areas where they may be at risk from being cut, trapped or damaged.
- Cables that are to be in walls and concealed underground must be protected using suitable conduit or plastic trunking.
- Ensure that the ground is suitable for pushing the spike into, and can support the luminaire. Do not install in very wet or boggy areas.

Installation


1. Position the transformer next to the mains outlet that the system will connect to. Do not connect at this stage.
2. After deciding the location of the product, and the position of the connector block, ensure that the cable is long enough to reach to the desired position.
3. Fit the spike to the bracket on the bottom of the fitting.
4. Push each spike into the ground making sure there are no underlying cables or obstacles. Ensure the cable attached is not overstretched as this could cause damage to the product.
5. Wire as detailed below.

Wiring

Having correctly identified the wiring from your existing light fitting, connect to the approved outdoor rated external terminal block in the following way:

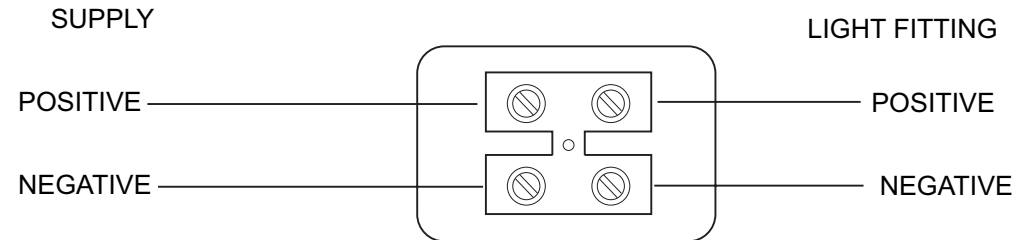

6. Connect the mains supply wiring as shown in the second diagram below, ensuring that you have correctly identified the wires. Ensure that the connections are tight, and that no loose strands have been left out of the connection block.
7. Ensure that the connections are tight, and that no loose strands have been left out of the connection block.
8. Replace the cover on the outdoor rated connector blocks.

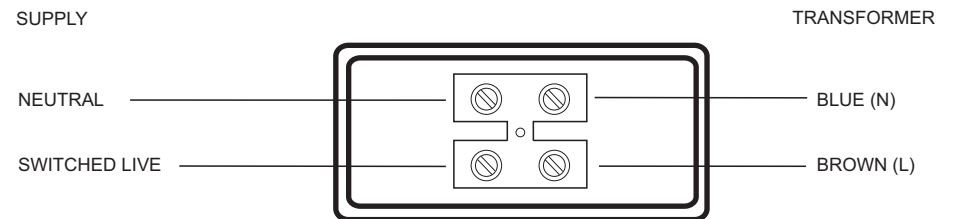

Check That

You have correctly identified the wires.

The connections are tight.

No loose strands have been left out of the connection block.